

**Heavy Commercial  
Upholstery**

**SYNERGY**

**PRISMA**  
FAUX LEATHER OPTIONS

# SYNERGY

## FAUX LEATHER PVC Heavy Commercial Upholstery

**SYNERGY** is our new odour and phthalate free PVC faux leather in 16 popular commercial colours tested to heavy commercial upholstery standards. SYNERGY is a perfect colour companion to BEACON - a sophisticated KAVLON, PRET & SHRUGS branded easy clean fabric woven to heavy commercial upholstery standards using inherently stain-resistant polyester yarns together with recycled polyester yarns retrieved from post consumer plastic bottles.

### SPECIFICATIONS

Composition: 100% PVC – Odour and Phthalate free.


Weight: 730 gsm

Width: 140 cm

Usage: Heavy Commercial-150,000 Martindale Cycles



### APPLICATIONS

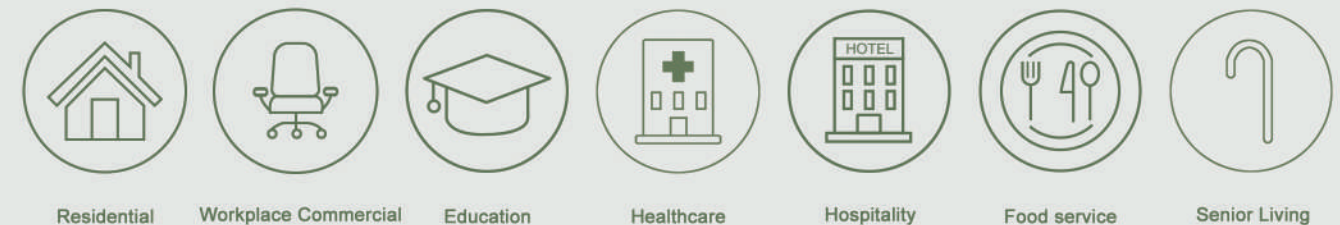

**CARE INSTRUCTIONS** For General & Spot Cleaning refer to detailed Fabric Care Label.




**PRISMA**  
FAUX LEATHER OPTIONS





SYNERGY

FAUX LEATHER PVC  
Heavy Commercial Upholstery

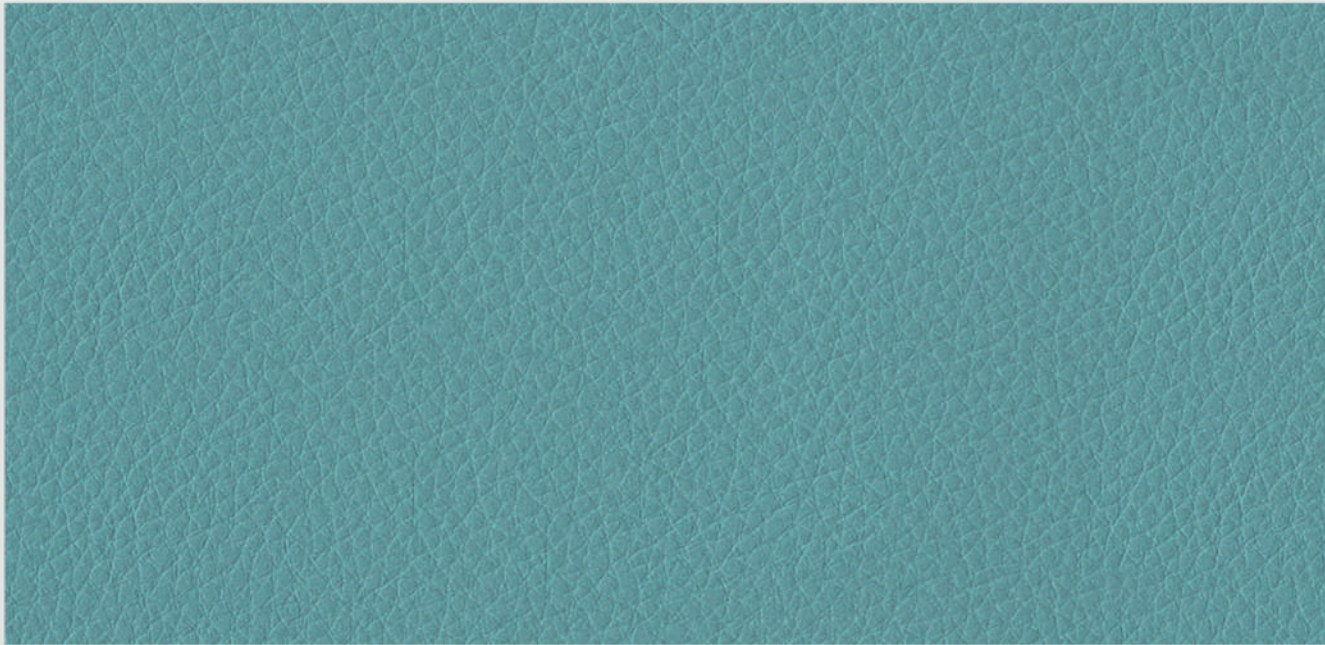

RANGE NAME	SYNERGY
PRODUCT BRAND	PRISMA-FAUX LEATHER PVC
DESCRIPTION	Faux Leather PVC Odour Free, Phthalate Free, Low VOC's
PERFORMANCE	HEAVY COMMERCIAL
APPLICATION	Upholstery, Commercial
COMPOSITION	100% PVC Face W/- Doubleknit Polyester Backing.
WIDTH	140cm
WEIGHT	730gsm
PATTERN REPEAT	PLAIN
CARE LABEL	PVC
STAIN RESISTANT	Wipe Clean-PFC FREE
WARRANTY	5 YEARS* <small>(in accordance with care instructions)</small>

TEST STANDARDS		TEST RESULTS
Martindale Abrasion ISO 12947		150,000 Cycles
Wyzenbeek Abrasion AS2001.2.30		100,000 Double Rubs
Seam slippage(mm) ISO 13936-2		Warp - 02.5 Weft - 3.3
Colour fastness to light Xenon arc (is0 105-B02, blue std 6)		5
Colour fastness to rubbing ISO 105-X12:1993		Dry-5 Wet-5 (Min 4)
Colour fastness to perspiration, alkaline ISO 105-E04		Colour Change - 5 (min 4) Staining Multifibre - 5 (min 4)
Free and hydrolysed formaldehyde ISO 14184-1:1998		Not Detectable
Colourfastness to bleaching -Hypochlorite AS2001.4 11-1982 5% Solution 40g/L Sodium Hypochlorite		Colour change 5 (after 5 Bleach Cleans)
Resistance to Flexing -AS4878.9 Mtd B (requirement - no cracking > 15,000 cycles)		No Cracking of PVC layer after 400,000 Cycles in Length & Width
FLAMMABILITY-AS/NZS 1530.3-1999		
Ignitability (0-20)		0
Spread of Flame (0-10)		0
Heat Evolved (0-10)		0
Smoke Developed (0-10)		6
Quality Management System ISO 9001		YES



Synergy Vanilla



Synergy Alaska



Synergy Moonrock




Synergy Kangaroo



Synergy Silver



Synergy Castlerock

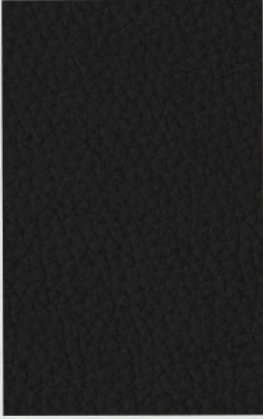

Synergy Caviar



Synergy Tan



Synergy Honey




Synergy Marsala




Synergy Aqua




Synergy Peacock

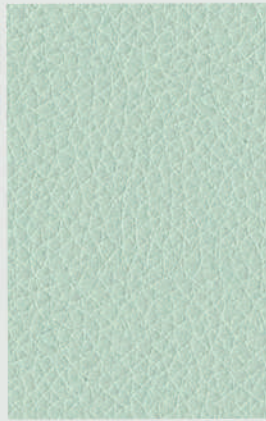

Synergy Celadon

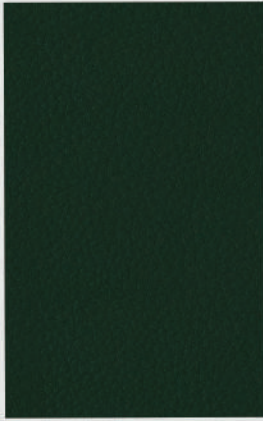

Synergy Evergreen

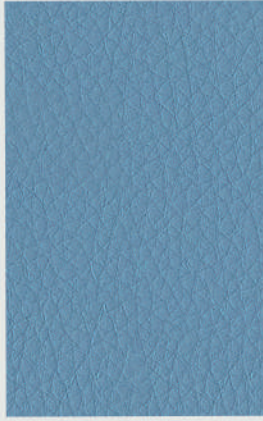

Synergy Powder Blue



Synergy Royal



fineseat